



200261.5L09.241

TLON 2.0 n/t 900 5950lm 3000K opal plexiglass (PLX) white

Decorative surface-mounted luminaire. It is possible to order the luminaires in various dimensions.


TECHNICAL DATA	Mounting: surface mounted Body: formed aluminum profile, plastic, steel sheet Colour: white RAL: 9003 Surface finish: matt Operating temperature range [°C]: 0 ... +35
ELECTRICAL DATA	Power supply efficiency: >90% Power: 220-240V 50/60Hz Includes light source: yes Output current [mA]: 350 Type of equipment: ED Light source / lamp: LED Electrical connection: max 3x0,75 mm ² wire Maximum number of luminaires in the circuit with a 10A fuse (B): 35 Maximum number of luminaires in the circuit with a 16A fuse (B): 56
OPTICAL DATA	Light distribution: symmetric Way of lighting: direct Type of optic: diffuser Diffuser: opal plexiglass (PLX) CRI/Ra: 80 Beam angle: >80° Lumen luminaire [lm]: 5950 Colour temperature [K]: 3000 ULOR / DLOR: 0/100
GENERAL DATA	Lifetime (L80B10): 100 000 h Operating temperature range: 0° C ... +35° C Available on request: luminaire in other sizes, DALI Warranty: 5 years Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques
CERTIFICATES, COMPLIANCES	Energy class: A++ Photobiological risk group: RGO



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Diffuser
200261.5L09.241	50	5950	119	3000	80	opal plexiglass (PLX)



Luminous flux tolerance +/- 10%; power tolerance +/- 5%; colour temperature tolerance +/- 5%.
 Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
 Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
 Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
 The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] W H D	Quantity in package	Net weight [kg]
200261.5L09.241	900 80 7	1	9,0

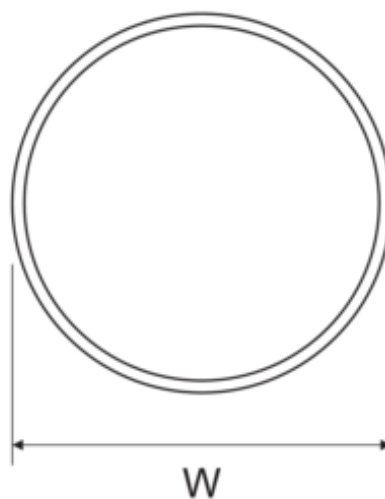

LIGHT BEAM CURVES

WAY OF LIGHTING

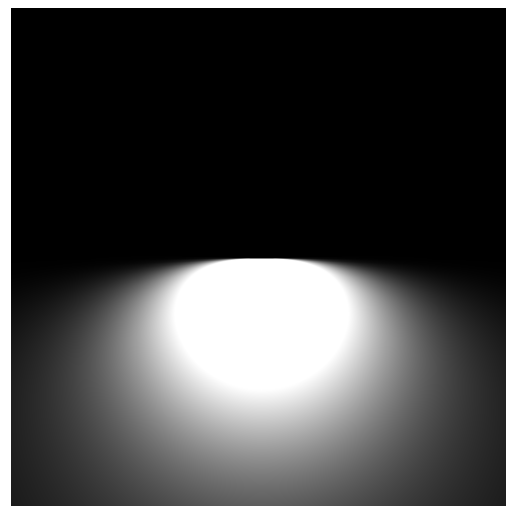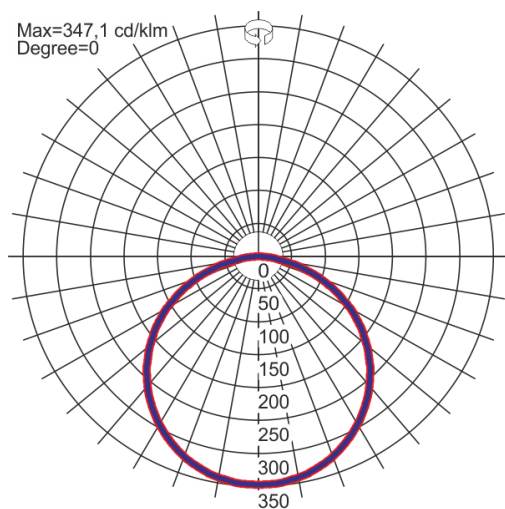

Luminous flux tolerance +/- 10%; power tolerance +/- 5%; colour temperature tolerance +/- 5%.
Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.