


Group in catalogue: CUSTOM

220-240V  
50/60 HzIK  
08IP  
66

Industrial luminaire for LED light sources. The subject of the modification is the use of sand-blasted tempered glass and the change of IK to 08.

**TECHNICAL DATA**

**Mounting:** surface mounted, in the ceiling, with mounting frame (sold separately), suspended, on chains (on request), manufacturer does not provide suspension components

**Body:** high pressure die-cast aluminum

**Colour:** gray

**Diffuser:** tempered glass

**ELECTRICAL DATA**

**Power supply efficiency:** >95%

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

**Electrical connection:** 3-pole connector

**Light distribution:** rotationally-symmetric

**OPTICAL DATA**

**Way of lighting:** direct

**GENERAL DATA**

**Lifetime (L70B50):** 60 000 h

**Lifetime (L80B10):** 50 000 h

**Lifetime (TM21 L90B10):** 40 000 h

**Available on request:** DALI, DIM 1..10V

**Warranty:** 3 years

**Application:** warehouses, logistics centers, industrial facilities, sport facilities, roofing


**Additional information:** Sand-blasted tempered glass. The possibility of using one or more power supplies in the luminaire.

**Other remarks:** Beam angle: 100°



Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
903092.00654	210	25400	121	4000	≥80
903092.00655	210	25400	121	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package
903092.00654	675 398 90	590	30	1
903092.00655	675 398 90	590	30	1

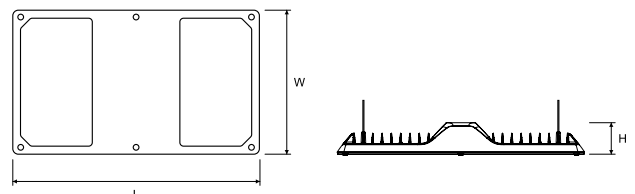**OTHER PICTURES**

Luminous flux tolerance +/- 10%; power tolerance +/- 5%; colour temperature tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.